


InclusiveEnergy



Cloud Solar

Data Driven Off-Grid Solar

Remote monitoring and analytics solutions for off-grid solar companies.

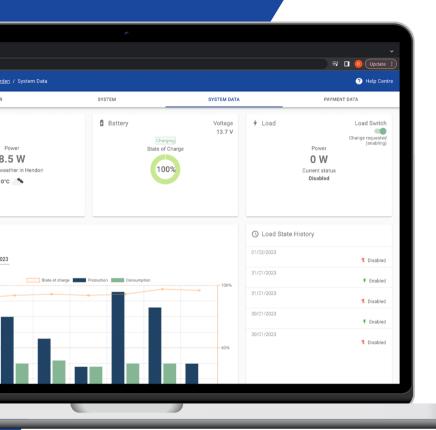

About

Cloud Solar

Cloud Solar is a remote monitoring and analytics solution for off-grid solar companies. Perfect for energy-as-a-service businesses, and monitoring of stand-alone productive use applications.

Cloud Solar helps energy providers to monitor their portfolios; operate PayGo and energyas-a-service models; manage field teams and stay in touch with customers.

Cloud Solar smart charge controllers and integrated packages offer:



Remote monitoring of DC solar systems up to 2 kW



Mobile data connectivity and 28 days of local data storage for areas with weak network.



Viewing live data, managing communications with customers, and control of devices on the Cloud Solar web platform.



Managing customer payment plans on our platform or via PayGo integrations.



A REST API giving direct access to your data for use with other software.



Smart Charge Controllers

Our smart monitoring, control and communications hardware is packaged into a range of charge controllers, enabling access to 'data driven solar' for a wide range of organisations. Cloud Solar is perfect for integration into 'component based' systems and for monitoring larger, productive use applications.

Pricing (Ex-works, India)

	CS Smart PWM 48-40	CS Smart PWM 24-40	CS Smart PWM 48-20	CS Smart PWM 24-20
PayGo Only	\$69	\$60	\$62	\$52
GSM Only	\$82	\$70	\$72	\$60
PayGo + GSM	\$90	\$78	\$80	\$68
Upgrade to 4G	\$5			

Specifications

	CS Smart PWM 48-40	CS Smart PWM 24-40	CS Smart PWM 48-20	CS Smart PWM 24-20
Nominal Battery Voltage	12/24/48V Auto Select	12/24V Auto Select	12/24/48V Auto Select	12/24V Auto Select
Abs Max Battery Voltage	60V	30V	60V	30V
Max Solar Voltage Open Circuit (Voc)	92V	46V	92V	46V
Max Solar Voltage Maximum Power Point (Vmpp)	72V	36V	72V	36V
Maximum Solar Current	40A 20A			DΑ
Maximum Load Current	40A 20A			DΑ
USB Max Current	2A			
Heat Sink	EVITIGOD AILIMINIUM			Fabricated Aluminium
Product Weight	433g 266g			266g


Battery Types

Supported Battery Types*	Typical No. of cells	Absorption / Full (V)	Bulk (V)	Float (V)	Low Voltage Disconnect (V)	Low Voltage Reconnect (V)
Flooded Lead-Acid Battery	6	14.4	13.2	14.1	11.1	12.3
GEL Battery	6	14.4	13.2	13.8	11.1	12.3
AGM Battery	6	14.4	13.2	13.8	11.1	12.3
Li-ion Batteries (3.2V nominal)	4	14.2	13.4	N/A	12	12.6
NMC/Graphite Li-ion Batteries (3.7V nominal)	3	12.6	11.7	N/A	9.9	10.8
NMC/Graphite High Voltage Li-ion Batteries (3.7V nominal, 4.35 max)	3	13.05	11.7	N/A	9.9	10.8

^{*}Default battery type is GEL. For any other battery type, make a request to Inclusive Energy.

^{**}Values shown for 12V nominal battery packs. For 24V or 48V, values are multiplied by 2x and 4x respectively.

Built In Protection

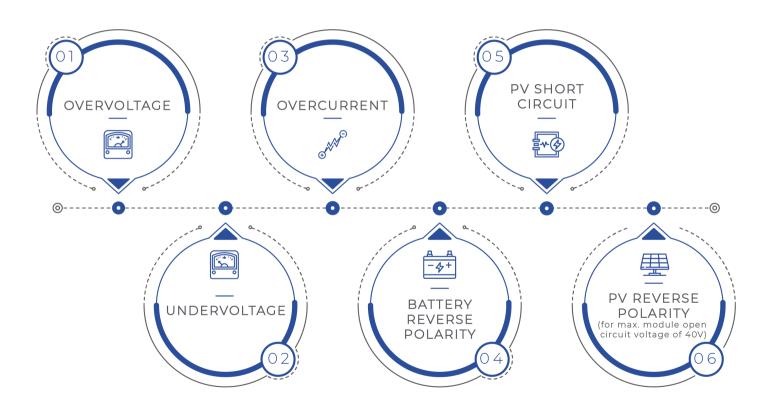

Communications*

2G (included)

- SIMCom SIM800C
- Quad-band GPRS

- SIMCom A7672S-FASE
- LTE Cat-1 + EDGE + GPRS
- BLE
- GNSS

Additional Features

- 1" OLED Display
- Multi-function button for OLED / Reboot
- External RJ45 socket for diagnostics
- PayGo functionality & software integrations



^{*} Global SIM card can be provided (+\$1.50), annual data costs vary depending on location.

Data Storage and Sending

Data packet granularity*	20 minutes
Data sending frequency*	4 hours
Data backup**	28 Days
Data points	Load State Load Power Total Load Energy (Wh) Solar Power (W) Solar Voltage (V) Total Solar Energy (Wh) Battery Voltage (V) State of Charge
	See Help Centre for more info: https://support.inclusive.energy/ portal/en/kb/articles/data-csv- file-12-5-2022

*Configurable, contact Inclusive Energy. **Depending on configuration.

Micro-Power

CS Micro-Power is a small, reliable and off-grid energy kit for applications that need 24/7 power. It uses our Cloud Solar smart charge controller, enabling remote monitoring and control.

The performance of the energy system is continuously monitored, with information fed remotely to the Cloud Solar web platform, allowing active monitoring and control of the CS Micro-Power system and the appliances it is powering.

Specifications

	Option 1	Option 2	Option 3	Option 4
Solar Panel Power	10W	20W	50W	100W
Battery Type	LiFePO4, 12.8V			
Battery Capacity	12Ah	24Ah	24Ah	30Ah
Charge Controller	CS Smart PWM 24-20			
Maximum Continuous Load	1VV	2W	4W	5W
Enclosure	IP65 or IP67 PVC enclosure			

Typical Applications

Wireless sensors, transmitters, base stations, modems

02 Process controls, instrumentation

03 rrigation drip systems, water pumping, valves

04 Flow meters, data loggers

05 SCADA & radio telemetry systems

06 Signage and signals, e.g. highway blinkers



Street Smart

CS Street Smart is our range of solar street lights, using the Cloud Solar smart charge controller to enable remote monitoring and control.

The performance of the energy system is continuously monitored, with information fed remotely to the Cloud Solar web platform, allowing active monitoring and control of the streetlights.



Specifications

Solar Panel Power	100W
Battery Type	LiFePO4, 12.8V
Battery Capacity	30Ah
LED Power	24W
Luminosity	120 lumens per Watt
Colour Temperature	6500K (cool white)
Hours of Light from Full Charge	12 hours
Charge Controller	CS Smart PWM 24-20
Indicators	LED indicator displaying charging and low battery
Features	Streetlight turns on when solar voltage < 4V* Streetlight turns off when solar voltage > 5V*

^{*}Set points are configurable.

Other streetlight configurations are available on request



Web Platform

All Cloud Solar products are connected to the Cloud Solar web platform.

The platform works seamlessly across web and mobile. It allows providers of solar energy assets to easily track the real-time performance of all installed systems, facilitate payments, and manage repair and maintenance operations with technicians.

Our versatile user interface allows different categories of users to access specific parts of the Cloud Solar service.





CRM with table and map views, search and filter

Capture and display of asset data + download data

Create payment plans

Pay as you go platform

Team management

Notifications

Business and energy analytics (coming soon)

Automated fault diagnosis (coming soon)



Get In Touch

+44 749 317 4489

www.inclusive.energy

INDIA
 No.1145, Fourth Floor,
 22nd Cross, Club Road, HSR Layout
 Bengaluru, 560102

UK

Edinburgh: 12 South Charlotte Street, Edinburgh, EH2 4AX

London: J406, The Biscuit Factory, Drummond Road, London, SE16 4DG

InclusiveEnergy

